GIBRALTAR BUILDING PRODUCTS

INSTALLATION GUIDELINES

MINI LOUVERS

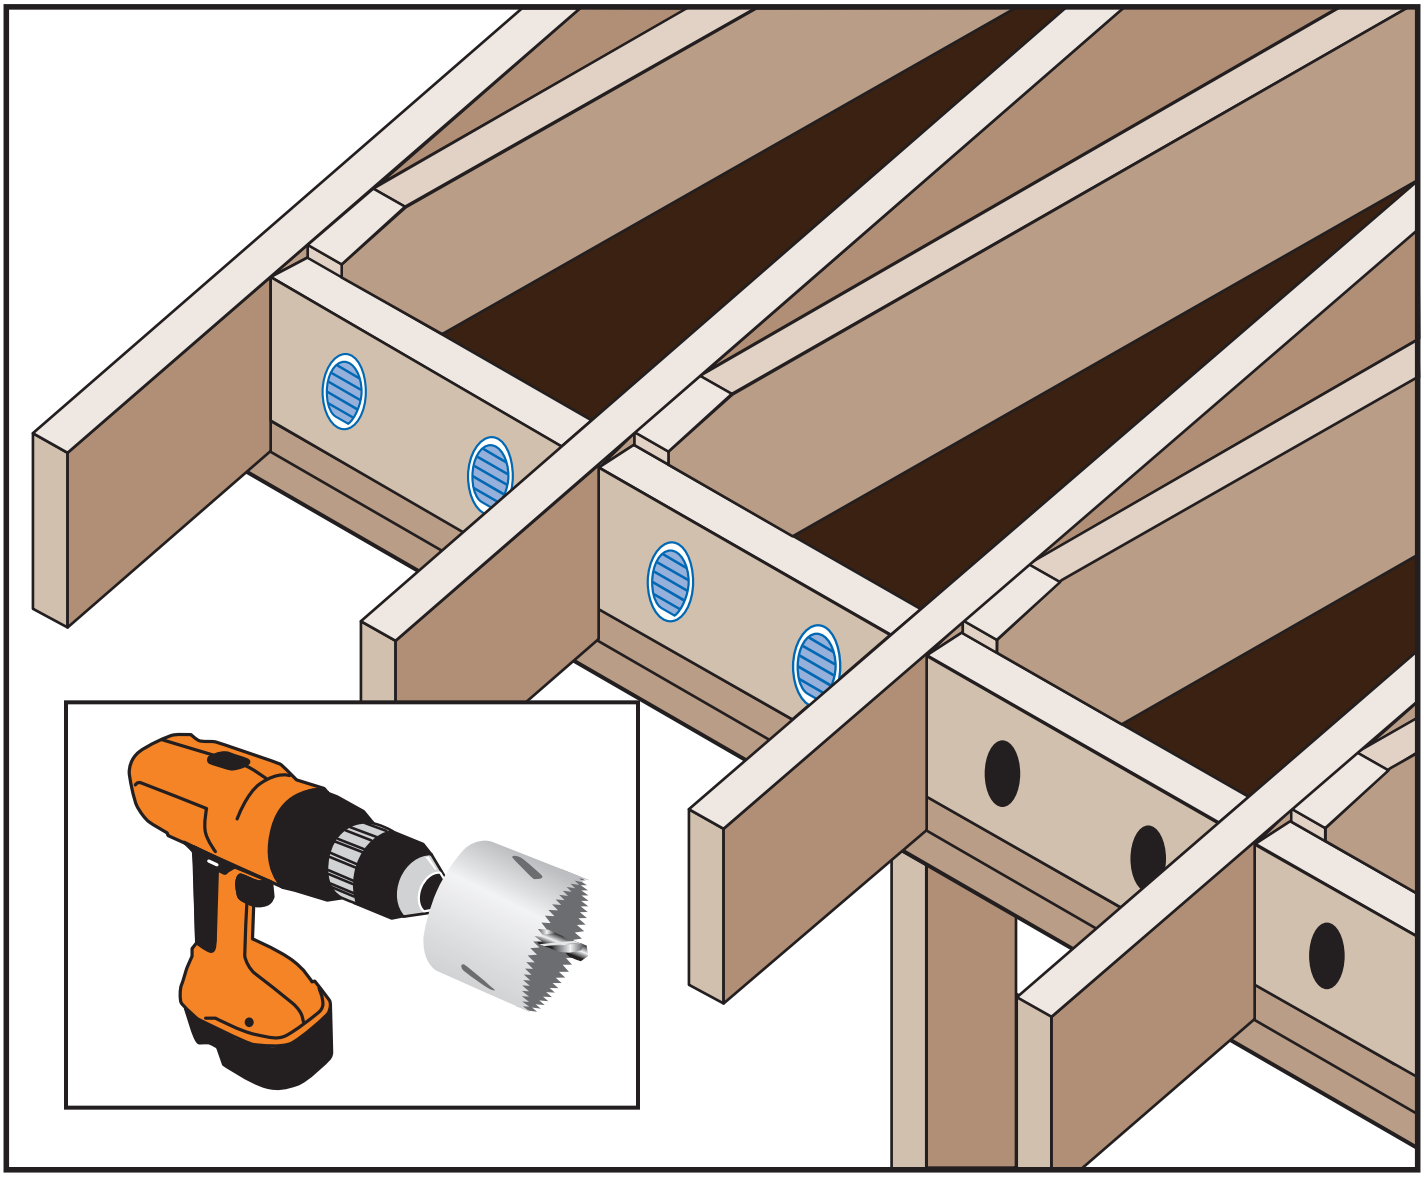

Mini Louvers are used to seal existing rafter/bird block vent holes to maximize airflow while protecting against rodent and insect invasion

If there are no pre-existing birdblock holes, use a hole saw drill bit to cut holes to the nominal size of the Mini Louver Vent: 2, 3 or 4 inch.

Lightly tap in the vents to pressure fit.

These installation guidelines are for use with typical or standard applications. It is always recommended to seek advice from a licensed professional, and to check with your local building inspector or building permit office for approvals and possible variations that may apply.